

TECHNICAL SPECIFICATIONS

▶ Static Stroke	86.0 mm
▶ Dynamic Stroke	76.2 mm
▶ Electro Mechanical Actuators	2
▶ Degrees of Freedom	2
▶ Single Actuator Payload	125 kg
▶ Gross Payload	250 kg


Axis	Position	Velocity	Acceleration
▶ Roll*	$\pm 7.4^\circ$	$\pm 19.8^\circ/\text{s}$	$\pm 1900^\circ/\text{s}^2$
▶ Pitch*	$\pm 7.4^\circ$	$\pm 19.8^\circ/\text{s}$	$\pm 1900^\circ/\text{s}^2$

*for the minimum placement value (600x600mm)

Operating Voltage 220V

Frequency Range 0-100 Hz

Connection Interface USB/Ethernet

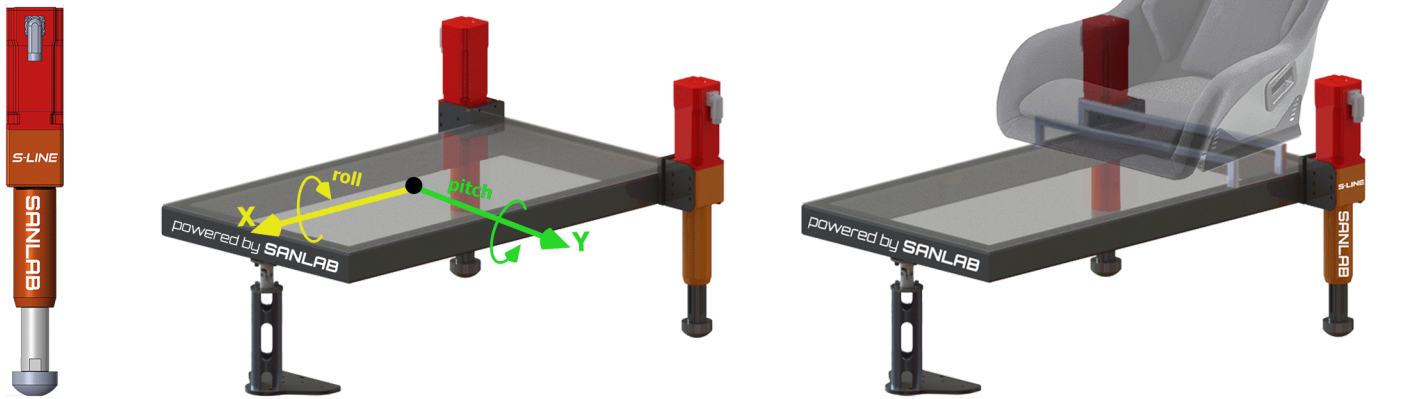

APPLICATIONS

- ▶ Ground Vehicle Simulators
- ▶ Military Simulators
- ▶ Teleoperation Systems
- ▶ Entertainment Systems



COMPONENTS

- ▶ Adaptable brackets
- ▶ All-in-one user interface
- ▶ Plug and play
- ▶ Low latency feedback



SOFTWARE

- ▶ System status monitoring
- ▶ Easy configuration
- ▶ Updatable, cloud base game center
- ▶ User friendly GUI

