



**COMPATIBLE WITH**

- ▶ Camera tracking systems
- ▶ Optic systems
- ▶ Antenna systems
- ▶ Radar systems
- ▶ Gimbal systems
- ▶ Rotator systems



**FACTS**

- ▶ 6 degrees of freedom
- ▶ 6 electro-mechanical actuators
- ▶ 100 kg total payload
- ▶ 200 mm actuator stroke



**APPLICATIONS**

- ▶ Component validation
- ▶ Signal replication
- ▶ Signal generation
- ▶ Real time simulation table
- ▶ Field data system testing simulator

**3D CONNECTION CONTROLLER**  
OPTIONAL



**SMOTION PRODUCT LINE**

SMOTION50


**SMOTION100**

SMOTION200

SMOTION500

SMOTION800

SMOTION1000



**DIMENSIONS**

**L1.1Xw1.0XH0.7 m**





**TECHNICAL SPECIFICATIONS**

**Performance Specifications**

- ▶ Gross Moving Load up to **100 kg**
- ▶ Actuator Stroke **200 mm**
- ▶ Center of Gravity Above Top Platform **0.20 m (Max)**
- ▶ Settled Height **0.44 m**
- ▶ Neutral Height **0.58 m**


**Moment of Inertia About**

- ▶ Moment of Inertia About X axis **45 kg.m<sup>2</sup>**
- ▶ Moment of Inertia About Y axis **45 kg.m<sup>2</sup>**
- ▶ Moment of Inertia About Z axis **45 kg.m<sup>2</sup>**

**Power Supply**

- ▶ **380VAC ±10%, 3ph , 50/60Hz**

	<b>Velocity</b>	<b>Acceleration</b>
▶ Surge	± <b>0.50 m/s</b>	± <b>5 m/s<sup>2</sup></b>
▶ Sway	± <b>0.50 m/s</b>	± <b>5 m/s<sup>2</sup></b>
▶ Heave	± <b>0.45 m/s</b>	± <b>6 m/s<sup>2</sup></b>
▶ Roll	± <b>43<sup>0</sup>/s</b>	± <b>300<sup>0</sup>/s<sup>2</sup></b>
▶ Pitch	± <b>43<sup>0</sup>/s</b>	± <b>300<sup>0</sup>/s<sup>2</sup></b>
▶ Yaw	± <b>53<sup>0</sup>/s</b>	± <b>400<sup>0</sup>/s<sup>2</sup></b>

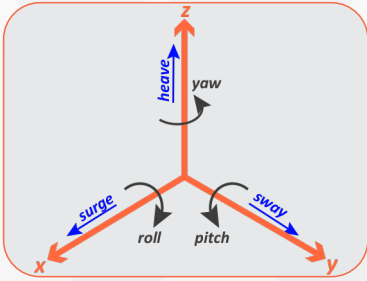

<b>Excursion</b>	<b>Single Axis</b>	<b>Multi Axis</b>
▶ Surge	<b>-0.16 m - 0.18 m</b>	<b>-0.21 m - 0.20 m</b>
▶ Sway	<b>-0.15 m - 0.15 m</b>	<b>-0.22 m - 0.22 m</b>
▶ Heave	<b>-0.13 m - 0.12 m</b>	<b>-0.13 m - 0.12 m</b>
▶ Roll	<b>-23.00<sup>0</sup> - 23.00<sup>0</sup></b>	<b>-28.30<sup>0</sup> - 28.30<sup>0</sup></b>
▶ Pitch	<b>-22.50<sup>0</sup> - 23.80<sup>0</sup></b>	<b>-30.10<sup>0</sup> - 30.90<sup>0</sup></b>
▶ Yaw	<b>-28.80<sup>0</sup> - 28.80<sup>0</sup></b>	<b>-32.10<sup>0</sup> - 32.10<sup>0</sup></b>



**HARDWARE COMPONENTS**

- ▶ User friendly interface control (GUI)
- ▶ Hardware real-time control
- ▶ UDP based PC communication
- ▶ IMU integrated measurement system
- ▶ Passive and active limitations



**SIMPLE, SAFE AND ERGONOMIC SOFTWARE**

- ▶ Signal generations
- ▶ Field data signal replication
- ▶ Real time signal visualization
- ▶ Signal recording and processing



**USER FRIENDLY GUI**

